



PASSAGGIO TETTO

Passaggio tetto ISO FIRE 650 G0 - ISO FIRE 1000 G0 SUPER ISO FIRE 700 G0 - SUPER ISO FIRE 1000 G0
Roof passage ISO FIRE 650 G0 - ISO FIRE 1000 G0 SUPER ISO FIRE 700 G0 - SUPER ISO FIRE 1000 G0

Passaggio tetto SUPER ISO FIRE 1000 G0

Supporting combined roof passage SUPER ISO FIRE 1000 G0

Il "PASSAGGIO A TETTO SUPER ISO FIRE 1000 G0" è un elemento in doppia parete di spessore maggiorato, contenente dell' isolante ad alta densità, vale a dire con prestazioni di isolamento maggiore, che diventa parte integrante e componente della canna fumaria nel passaggio dei fumi al suo interno (per lo spessore consultare la tabella relativa al diametro richiesto). Questo elemento viene fissato al tetto o al solaio, tramite apposite staffe di sostegno (con silicato isolante tra materiali infiammabili e staffe, onde evitare la trasmissione del calore per contatto); le staffe sono regolabili sia in inclinazione che in altezza tramite appositi punti di presa predisposti nell'elemento, necessari alla regolazione stessa. Nella parte superiore ed inferiore del "PASSAGGIO A TETTO SUPER ISO FIRE 1000 G0" si devono montare gli elementi della serie ISO 25 (04 o 05) con il corretto diametro richiesto per l'installazione, tramite gli attacchi già predisposti, rendendo quindi il sistema unico. Questo elemento è adatto sia in fase di predisposizione della futura canna fumaria con la parte a tetto finita, sia in fase di installazione della canna fumaria completa, laddove vi sia la necessità particolare di sostenere il peso della stessa, affinché non gravi sulla parte sottostante (es. installazione a solaio con dispositivo termico perpendicolare alla canna fumaria). In questo modo si garantisce ulteriormente la sicurezza di isolamento delle parti soggette a possibile incendio, in particolare nel caso in cui venga a mancare la corretta manutenzione della canna fumaria ISO 25 (04 o 05) prevista obbligatoriamente dalla norma in vigore (UNI EN 10683), o in caso di errata installazione da parte dell'utente finale, non mantenendo ad esempio le distanze minime richieste e dichiarate nelle DOP. L'elemento "PASSAGGIO A TETTO SUPER ISO FIRE 1000 G0" è conforme alla normativa solo se installato in abbinamento con le canne fumarie doppia parete R2C ISO 25 (04 o 05).

The "SUPPORTING ROOF PASSAGE SUPER ISO FIRE 1000 G0" is a double-walled element of increased thickness, containing high-grade insulation density, i.e. with higher insulation performance, which becomes an integral part and component of the chimney in the passage of smokes inside it (for the thickness see the table relating to the required diameter). This element is fixed to the roof or to the attic, by means of special support brackets (with insulating silicate between flammable materials and brackets to avoid the transmission of heat by contact); the brackets are adjustable both in inclination and in height by means of special grip points predisposed in the element necessary for the adjustment itself. In the upper and lower part of the "SUPPORTING ROOF PASSAGE SUPER ISO FIRE 1000 G0" the elements of the ISO 25 (04 or 05) series must be installed with the correct diameter required for installation, using the connections already prepared, thus making the system unique. This element is suitable both in the preparation phase of the future chimney system with the finished roof part, both during the installation phase of the complete chimney, where there is a particular need to support the weight of the same, so that it does not affect the underlying part (e.g. ceiling installation with thermal device perpendicular to the chimney). In this way the insulation safety of the parts subject to possible fire is further guaranteed, in particular if it occurs lack of proper maintenance of the ISO 25 (04 or 05) chimney as required by the current standard (UNI EN 10683), or in case of incorrect installation by the end user, for example by not maintaining the minimum distances required and declared in the DOP. The element "SUPPORTING ROOF PASSAGE SUPER ISO FIRE 1000 G0" complies with the regulations only if installed in combination with the twin wall chimneys R2C ISO 25 (04 or 05).

ATT...-1000G0

Passaggio tetto SUPER ISO FIRE 1000 G0

Supporting combined roof passage SUPER ISO FIRE 1000 G0



		Inox - Stainless Steel		Nero - Black		
Di	De	Code	€	Code	€	
80	130	ATT080.IN1000G0		NER080.IN1000G0		1
100	150	ATT100.IN1000G0		NER100.IN1000G0		1
130	180	ATT130.IN1000G0		NER130.IN1000G0		1
150	200	ATT150.IN1000G0		NER150.IN1000G0		1
180	230	ATT180.IN1000G0		NER180.IN1000G0		1
200	250	ATT200.IN1000G0		NER200.IN1000G0		1
250	300	ATT250.IN1000G0		NER250.IN1000G0	-	1
300	350	ATT300.IN1000G0		NER300.IN1000G0	-	1

ATT...-FALPAS

Falddale inclinato base piombo 5°÷30°

+ scossalina per passaggio tetto SUPER ISO FIRE 1000 GO

Sloped square flashing 5°÷30° lead base + collar for roof passage SUPER ISO FIRE 1000 GO





Øi	Øe	Inox - Stainless Steel		Rame - Copper		
		Code	€	Code	€	
80	130	ATT080.INFALPAS		ATT080.RAFALPAS		1
100	150	ATT100.INFALPAS		ATT100.RAFALPAS		1
130	180	ATT130.INFALPAS		ATT130.RAFALPAS		1
150	200	ATT150.INFALPAS		ATT150.RAFALPAS		1
180	230	ATT180.INFALPAS		ATT180.RAFALPAS		1
200	250	ATT200.INFALPAS		ATT200.RAFALPAS		1
250	300	ATT250.INFALPAS		ATT250.RAFALPAS		1
300	350	ATT300.INFALPAS		ATT300.RAFALPAS		1

PASSAGGIO TETTO

Schema di montaggio

Assembly scheme

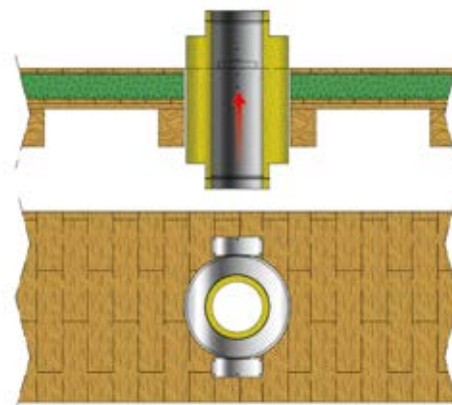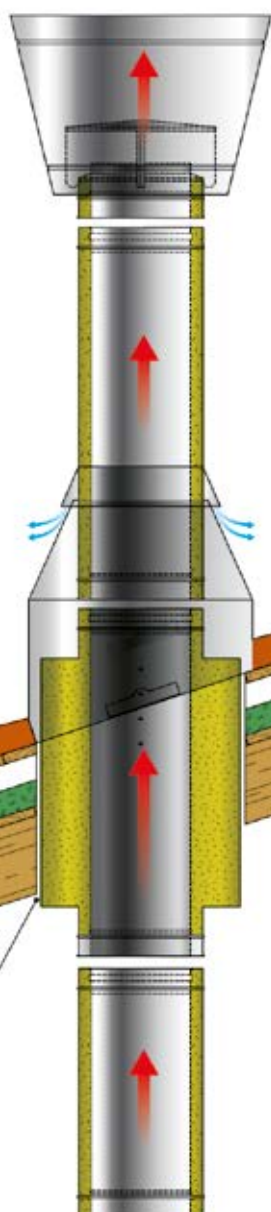

Esempio installazione a solaio piano
Example of installation on a flat floor

Dimensioni

Sizes



Ø ISO 25
804 - 05)


Øi	Øe	Ø1	Ø2
80	130	130	280
100	150	150	300
130	180	180	350
150	200	200	350
180	230	230	400
200	250	250	400
250	300	300	450
300	350	350	500



D5A...-25ROSPAS

Rosone piano 0°÷21°

Flat ring 0°÷21°



Ø1	Ø2
300	420
300	420
350	470
350	470
400	520
400	520
450	570
500	620

Øi	Øe
80	130
100	150
130	180
150	200
180	230
200	250
250	300
300	350

Aisi 304	
Code	€
D5A080.25ROSPAS	
D5A100.25ROSPAS	
D5A130.25ROSPAS	
D5A150.25ROSPAS	
D5A180.25ROSPAS	
D5A200.25ROSPAS	
D5A250.25ROSPAS	
D5A300.25ROSPAS	

Rame - Copper	
Code	€
DPR080.25ROSPAS	
DPR100.25ROSPAS	
DPR130.25ROSPAS	
DPR150.25ROSPAS	
DPR180.25ROSPAS	
DPR200.25ROSPAS	
DPR250.25ROSPAS	
DPR300.25ROSPAS	


Nero - Black	
Code	€
NER080.25ROSPAS	
NER100.25ROSPAS	
NER130.25ROSPAS	
NER150.25ROSPAS	
NER180.25ROSPAS	
NER200.25ROSPAS	
NER250.25ROSPAS	
NER300.25ROSPAS	

1
1
1
1
1
1
1
1

D5A...-25ROPACU

Rosone piano 20°÷40°

Flat ring 20°÷40°



Øi	Øe
80	130
100	150
130	180
150	200
180	230
200	250
250	300
300	350

Ø1
300
300
350
350
400
400
450
500

Aisi 304	
Code	€
D5A080.25ROPACU	
D5A100.25ROPACU	
D5A130.25ROPACU	
D5A150.25ROPACU	
D5A180.25ROPACU	
D5A200.25ROPACU	
D5A250.25ROPACU	
D5A300.25ROPACU	

Rame - Copper	
Code	€
DPR080.25ROPACU	
DPR100.25ROPACU	
DPR130.25ROPACU	
DPR150.25ROPACU	
DPR180.25ROPACU	
DPR200.25ROPACU	
DPR250.25ROPACU	
DPR300.25ROPACU	

Nero - Black	
Code	€
NER080.25ROPACU	
NER100.25ROPACU	
NER130.25ROPACU	
NER150.25ROPACU	
NER180.25ROPACU	
NER200.25ROPACU	
NER250.25ROPACU	
NER300.25ROPACU	

1
1
1
1
1
1
1
1

D5A...-25TELPAS

Elemento telescopico serie Eco 25 a linee Pellet o Nero Ferro

Telescopic element for series Eco 25 to Pellet or Nero Ferro lines



MONO NERO (Pellet) PELLET 1,2 NERO FERRO	
Øi	
80	
100	
120	
130	
140	
150	
180	
200	

ECO 25	
Øi	Øi
80	130
100	150
130	180
130	180
150	200
150	200
180	230
200	250

Inox Stainless Steel	
Code	€
D5A080.25TELPAS	
D5A100.25TELPAS	
D5A120.25TELPAS	
D5A130.25TELPAS	
D5A140.25TELPAS	
D5A150.25TELPAS	
D5A180.25TELPAS	
D5A200.25TELPAS	

Nero - Black	
Code	€
NER080.25TELPAS	
NER100.25TELPAS	
NER120.25TELPAS	
NER130.25TELPAS	
NER140.25TELPAS	
NER150.25TELPAS	
NER180.25TELPAS	
NER200.25TELPAS	

1
1
1
1
1
1
1
1